

CGL600W SERIES PURE SINEWAVE INVERTER 600W / 700VA

Input: 12V, 24V, 48V
Six models for 110V 50/60 HZ
& 220V 50/60HZ Output



CE FC cULus e13

APPLICATIONS

Nova Electric's CGL-Series inverters are intended for commercial and industrial applications wherever pure sinewave power is needed at 50 or 60 Hz.

These inverters are ideal for running electronic loads such as computers, monitors, printers, telecom systems, radios, fluorescent lamps from batteries, field generators, and solar electro-voltaic panels. They can also drive hand drills, motors and small compressors – please consult the factory for proper sizing.

These CGL models can also be optionally ruggedized against shock, vibration, and humidity for military applications including vehicle mounted, shipboard, submarine, aircraft, and ground fixed shelters.

- Computers
- Monitors
- Printers
- Electric Tools
- RVs
- Sail Boats
- Photo Voltaic
- Instruments
- Appliances



NOVA ELECTRIC
www.novaelectric.com
novasales@theallpower.com



A Leader in Inverter Technology since 1966 - 500VA to 500+KVA

PURE SINEWAVE DC-AC INVERTER

SPECIFICATIONS

FEATURES

- Microprocessor based design with absolutely accurate and stable frequency
- Compact and lightweight, yet rugged and vehicle rated
- Tightly regulated output voltage and frequency
- Switch selectable 50 or 60 Hz output
- Capable of driving highly reactive loads such as electric tools and appliances
- Capable of driving highly capacitive loads such as switching power supplies
- Very low harmonic distortion, THD < 4%
- Suitable for vehicle or wall mounting
- Switch selectable +/-10V output change
- Sinewave performance at modified sinewave prices
- UL / e-13 / CE / FCC Approved

ELECTRICAL

Input: 12VDC; 24VDC; 48VDC Nominal
 Output for 110V Models: 100/110/120VAC
 Output for 220V Models: 220/230/240VAC
 Frequency: 50 or 60Hz user selectable
 Accuracy: +/- 0.05%
 Power Rating Continuous: 600W/700VA
 Surge Rating: 800W/1000VA
 Peak Output Current 110V Models: 10A
 Peak Output Current 230V Models: 5A
 Efficiency (full load): 110V model 83%
 Efficiency (full load): 220V model 90%
 No Load Current: 0.7A (110 V Models)
 0.35A (230 V Models)
 Output Waveform: Sinewave <5% THD
 Output Regulation: -10% / +4% all models

PROTECTIVE FEATURES

Overload
 Shortcircuit
 Reverse polarity (fuse)
 Overtemperature
 Over/under input voltage
 Fan failure

ENVIRONMENTAL

Operating Temp.: -20° to +50°C
 Storage Temp. Range: -40° to +71°C
 Humidity: To 95% non-condensing

INDICATORS

Input level, Output level, Failure

SAFETY


UL458 EN60950

MODEL SELECTION

| INPUT (VDC) | 120V MODELS 50 or 60 Hz | 220V MODELS 50 or 60 Hz | DIMENSIONS L x W x H (Inches) | WEIGHT |
|-------------|----------------------------|----------------------------|----------------------------------|--------|
| 10.5 - 15V | CGL600W-12-120 | CGL600W-12-220 | 10.6 x 7.10 x 2.8 | 6.6 LB |
| 21 - 30V | CGL600W-24-120 | CGL600W-24-220 | 10.6 x 7.10 x 2.8 | 6.6 LB |
| 42 - 60V | CGL600W-48-120 | CGL600W-48-220 | 10.6 x 7.10 x 2.8 | 6.6 LB |

| SPECIFICATION | 110V MODELS | 220V MODELS |
|------------------------------|---------------------------|---|
| EMI CONDUCTION AND RADIATION | Compliance to FCC class A | Compliance to En55022 class A |
| EMS IMMUNITY | - | Compliance to EN61000-3-2,3 |
| LVD | - | Compliance to EN60950-1 |
| e-MARK | - | Compliance to e-13*72/245/EEC, 95/54/EC |

MECHANICAL SPECIFICATIONS

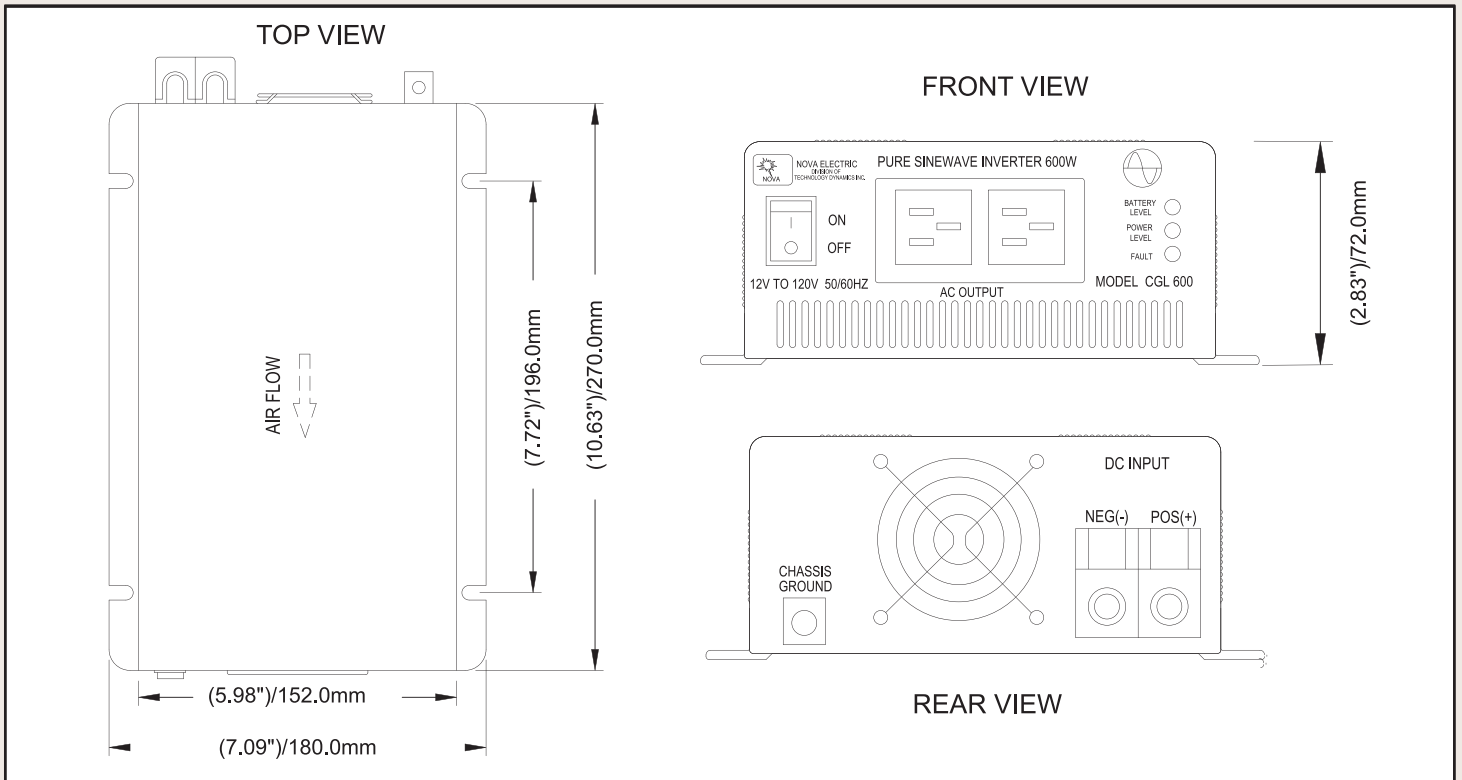

WEB : www.novaelectric.com

E-Mail : novasales@theallpower.com

PHONE : (201) 385-0500 FAX : (201) 385-0702



NOVA ELECTRIC

A Division of

TECHNOLOGY DYNAMICS, INC.

100 School St., Bergenfield NJ 07621



ISO 9001